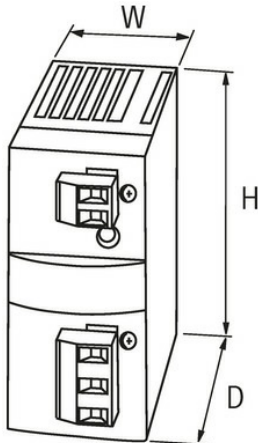
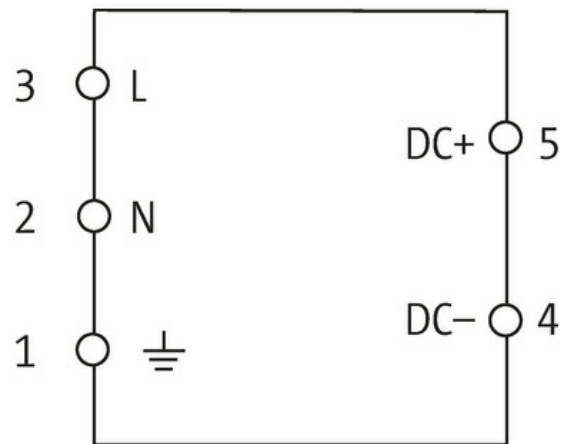


**MCS-B POWER SUPPLY 1-PHASE,**

IN: 90-265VAC OUT: 12-15V/1ADC

INPUT: 90...265 V AC  
 OUTPUT: 12 V DC  $\pm$ 1%  
 Current: 1 A

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+50 °C, ...+60 °C derating (storage temperature -25...+85 °C)
Relative humidity	5...95%, no condensation
Efficiency	77%
Dimensions HxWxD	76x38x87.5 mm

**Output**

Output voltage	12 V DC (SELV), $\pm$ 1%; 12...15 V adjustable
LED display	LED (green) for output voltage
Output current	1 A (+50 °C); 0.8 A (+60 °C)
Mains failure bridging time	min. 20 ms (115 V AC); min. 150 ms (230 V AC)

Ripple	max. 50 mV eff/rms
Spikes	max. 300 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	no/yes (max. 2 units)

**Input**

Input voltage	90...265 V AC/110...300 V DC
Primary fusing external	max. 10 A
Input current	0.29 A (115 V AC); 0.16 A (230 V AC)
Inrush current after 1 ms	max. 20 A
Frequency	50...60 Hz

**Commercial data**

country of origin	CZ
customs tariff number	85044090
EAN	4048879079921
eClass	27049002
Packaging unit	1.000