

MOSA M12 FEMALE 0° FIELD-WIREABLE (IDC)5-pol., 0,34-0.5mm²


Female straight

M12, 5-pole


IDC terminals

Connection cross section: 0.34...0.5 mm²

The resistance to aggressive media should be individually tested for your application. Further details on request.

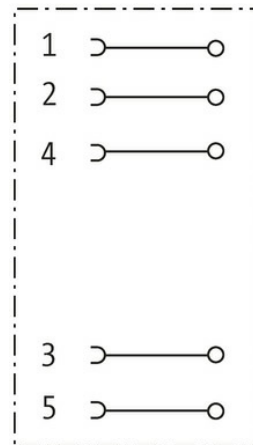[Link to Product](#)**Illustration**

Female



Product may differ from Image

**Form**

Form 12593

Technical Data

Operating voltage max. 50 V AC/DC

Operating current per contact max. 4 A

Connection cross section 0.34...0.5 mm² (conductor diameter min. 0.1 mm)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Sealing range (cable Ø)	4.7...6 mm
Protection	IP67 inserted and tightened (EN 60529)
Outer wire Ø	1.2...2.0 mm

General data

Temperature range	-25...+85 °C
Dimensions H×W×D	49×20.5×20.5 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879306003
eClass	27279221
Packaging unit	1.000