


M12-RJ45-ETHERNET-ADAPTER 90°

D-Cod., 4-pol.


Ethernet CAT5
Control cabinet entry system
Female straight – female 90°
M12 – RJ45, 4-pole
D-coded
shielded

Plastic housings with good resistance against chemicals and oils.



The resistance to aggressive media should be individually tested for your application. Further details on request.

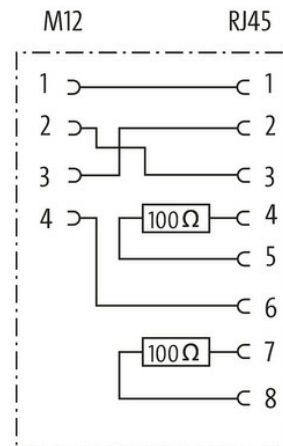[Link to Product](#)**Illustration**

Female




Female



Depth: 23 mm

panel cut out



Product may differ from Image

EtherNet/IP

PROFI
NET

EtherCAT

Form

Form 99052

Technical Data

Operating voltage max. 60 V DC

Operating current per contact max. 2 A

Transfer parameters	CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)
---------------------	--

Transfer rate	up to 100 Mbit/s full duplex
---------------	------------------------------

Protection	IP67 (M12) - IP20 (RJ45)
------------	--------------------------

Locking material	Zinc die casting, matte nickel plated
------------------	---------------------------------------

General data

Temperature range	-5...+60 °C
-------------------	-------------

Mounting set	M16 x 1.5 mm (max. 0.8 Nm)
--------------	----------------------------

Mounting plate thickness	max. 5 mm
--------------------------	-----------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879114158
-----	---------------

eClass	27061801
--------	----------

Packaging unit	1.000
----------------	-------