

MODLINK MSDD DATA INSERT

1×SUB-D25 fem./male + 1×SUB-D9 fem./male + 1×RJ45

RJ45; SUB-D9; SUB-D25


1× RJ45, 8-pole metal, CAT5e (female/female)

1× SUB-D9 (female/male)

1× SUB-D25 (female/male)

Link to Product

Illustration

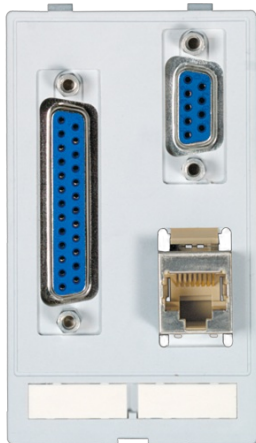

Product may differ from Image



General data

Dimensions H×W×D 88×51×21 mm

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

SUB-D9

Connection rear side	SUB-D (male)
Operating current (UL Rating)	max. 175 mA
Connection front side	SUB-D (female)
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole
Operating voltage	48 V AC/DC

Shielding plate

Tightening torque	0.9 Nm ±0.1
Connection	Threaded hole M4

SUB-D25	
Locking of ports	UNC 4...40 bolt
Operating current	3 A
Connection rear side	SUB-D (male)
Connection front side	SUB-D (female)
Operating voltage	48 V AC/DC
Operating current (UL Rating)	max. 175 mA
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
No. of poles	25-pole

Commercial data	
country of origin	DE
customs tariff number	85366990
EAN	4048879037402
eClass	27189217
Packaging unit	1.000