

M12 ADAPTOR ON TOP OF MSUD VALVE PLUG FORM A 18MM

Form A (18 mm) – M12, connector top entry

24 V AC/DC $\pm 25\%$

for pressure switches

LED (yellow/green)


4-pole

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)


Illustration

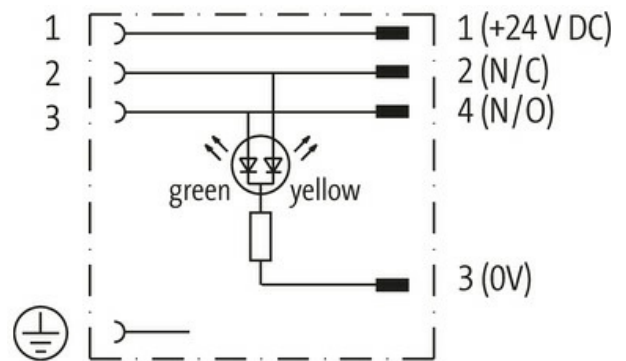

Female



Male

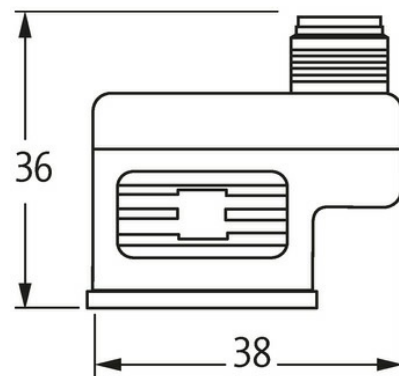

Depth: 27 mm

Product may differ from Image



Form

Form 41361

Technical Data

| | |
|-------------------------------|-----------------------|
| Operating voltage | 24 V AC/DC $\pm 25\%$ |
| Rated surge voltage | 0.8 kV |
| Operating current per contact | max. 4 A |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

| | |
|------------------|--|
| Switch off peak | max. 55 V |
| Locking of ports | M3 (recommended torque 0.4 Nm) |
| Protection | IP67 inserted and tightened (EN 60529) |

General data

| | |
|-------------------|--------------|
| Temperature range | -25...+90 °C |
|-------------------|--------------|

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85366990 |
| EAN | 4048879144650 |
| eClass | 27143423 |
| Packaging unit | 1.000 |