

EMPARRO MEF 1/1 1-phase, 1-stage

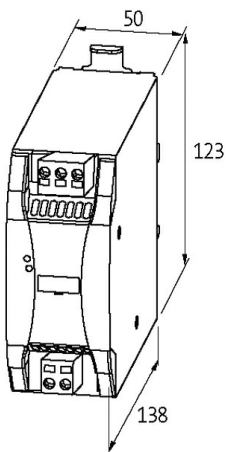
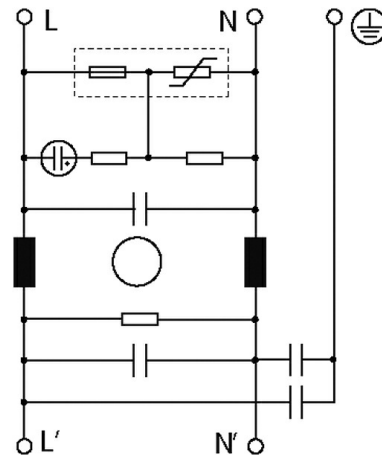
I:20A U:230 VAC, snap on, with surge protection

Over voltage protection

Current: 20 A

DIN-rail mountable

Attenuation curves on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	85...265 V AC/100...230 V DC
Connection cross section	1.5...10 mm ² single core (AWG 16...8); 1.5...6 mm ² multiple core (AWG 16...10)
Operating frequency	50...60 Hz
Consumption	max. 1 mA (250 V AC)

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
-----------------	------------------------------------

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Climatic category	Environment class (EN 60721)
Connection	Push-In terminals
Dimensions H×W×D	123×50×138 mm
Commercial data	
country of origin	RO
customs tariff number	85363030
EAN	4048879464468
eClass	27130806
Packaging unit	1.000