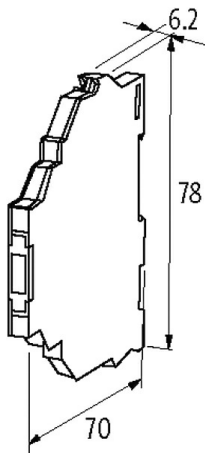
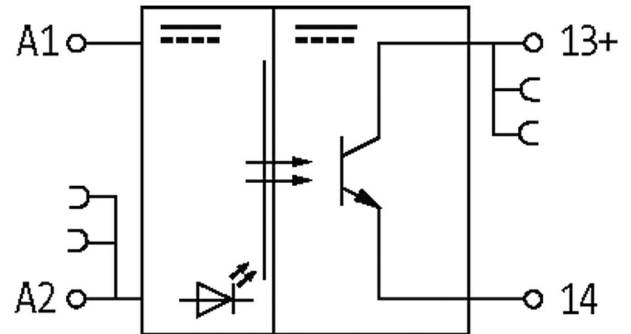


MIRO TR 24VDC FK 4P OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 0,5 A

Transistor 0.5 A
24 V DC
Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 10 μ A
Switching time ON/OFF	35/400 μ s
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 1000/100 Hz (resist./ind.)
Switching current per output	0.1 mA...0.5 A

Input

Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879021883
eClass	27371601
Packaging unit	1.000