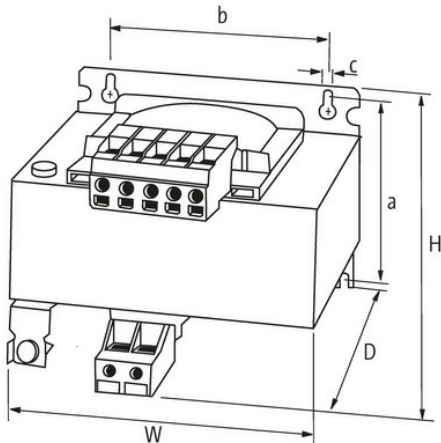
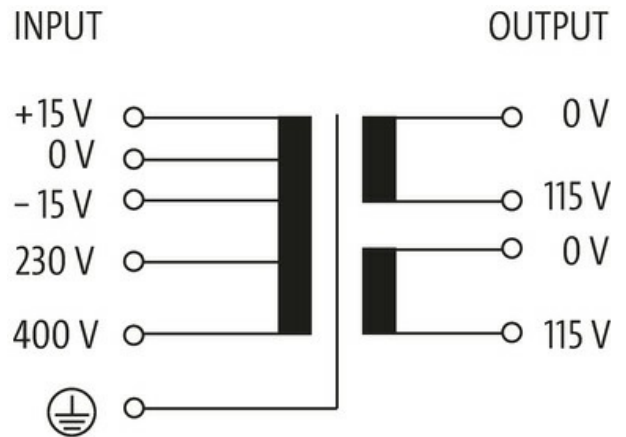


MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 1600VA IN: 230/400VAC +/- 15VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
 1600 VA
 Isolation class T 40/B

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C, no condensation
Test isolation voltage	5.8 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	141.5×135×7 mm

Dimensions H×W×D 168×174×163 mm

Output

Output voltage 1× 230, 1× 115, 2× 115 V AC

Output rating 1600 VA

Input

Input voltage 230/400 ±15 V AC

Inrush current 135 A (230 V AC); 70 A (400 V AC)

Short-circuit current 285 A (230 V AC); 169 A (400 V AC)

Input current 7.3 A (230 V AC); 4.2 A (400 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043200

EAN 4048879366885

eClass 27031302

Packaging unit 1.000