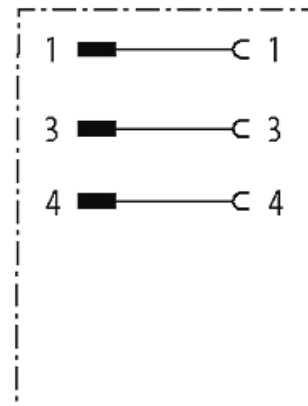
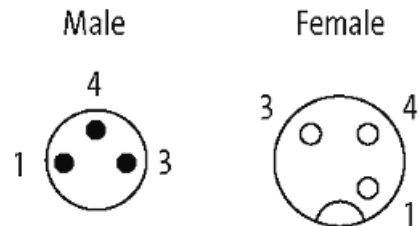
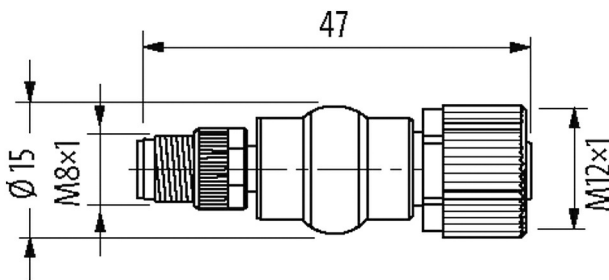


ADAPTOR M8 MALE 3 POLE/ M12 FEMALE CONF. 1,3,4

Adapter
Male - female
M8 – M12, 3-pole
for M8 distribution box 3-pole

[Link to Product](#)**Illustration**

Product may differ from Image

**Form**

Form 88521

Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category I
Coding	A-coded
Locking of ports	Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing
Compression gland	M8 (SW9), M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated

Material PUR

General data

Test isolation voltage 0.8 kV eff/rms

Pollution Degree 3

Temperature range -25...+85 °C

Commercial data

country of origin DE

customs tariff number 85366990

EAN 4048879118521

eClass 27143423

Packaging unit 1