

MOSA 7/8" FEMALE 0° FIELD-WIREABLE (IDC) V2A5-pol., 0,75-1,50mm²

Female straight

7/8" (5-pole)


IDC terminals

Connection cross section: 0.75...1.5 mm²


Stainless steel 1.4305 (V2A)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

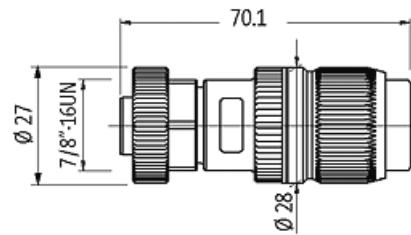[Link to Product](#)**Illustration**

Female

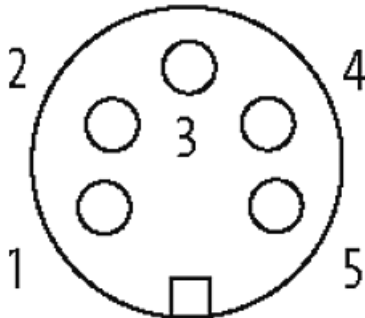

Product may differ from Image

Form

Form 78211

Technical Data

Operating voltage	max. 230/400 V AC/DC
Rated surge voltage	4.0 kV
Operating current per contact	max. 10 A
Material group	IEC 60664-1, category I
Connection cross section	0.75...1.5 mm ² (conductor diameter min. 0.15 mm)
Coding	A-coded, 5-pole
Sealing range (cable Ø)	6.8...9.5 mm
Wire isolation	PVC, PP, TPE
Outer wire Ø	max. 2.8 mm
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
------------	--

Locking material	Stainless steel 1.4305 (V2A)
------------------	------------------------------

Material	PA
----------	----

General data

Pollution Degree	3
------------------	---

Temperature range	-40...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879111454
-----	---------------

eClass	27279221
--------	----------

Packaging unit	1
----------------	---