
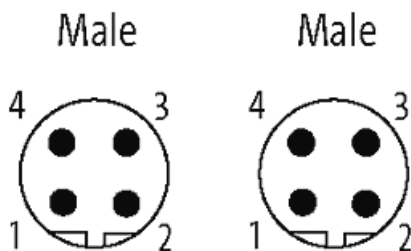
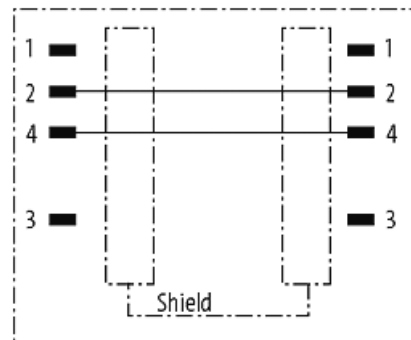


M12 ADAPTOR MALE B-CODED / M12 MALE B-CODED

Adapter
Male - male
M12 – M12, 2-pole
B-coded
shielded

[Link to Product](#)

Illustration

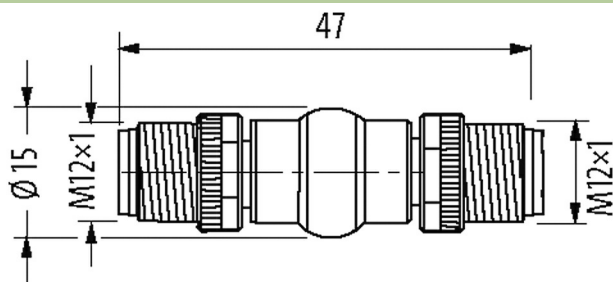

Product may differ from Image

Form

Form 44201

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
Material	PUR
Rated surge voltage	1.5 kV

General data

Temperature range	-25...+85 °C
Test isolation voltage	0.8 kV eff/rms

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879317481
eClass	27143423
Packaging unit	1