




## MASI20 INSTALLATION TECHNOLOGY

Distributor AS-I and extern power, 3 potentials

5 ports, universal  
3 potentials  
without plug terminals

### [Link to Product](#)

#### Illustration

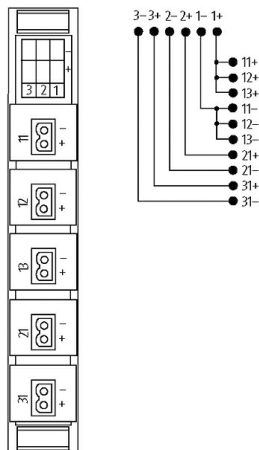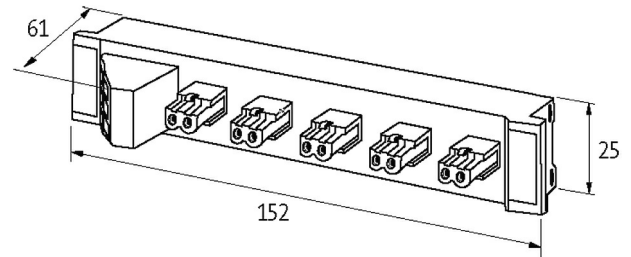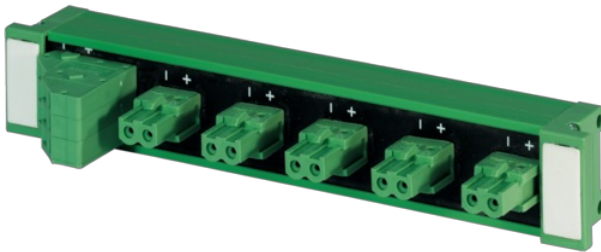

Product may differ from Image



#### Technical Data

Operating voltage	max. 36 V DC
Current per connection	max. 8 A
Total current	max. 12 A

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+70 °C
Test isolation voltage	AS-Interface/Power 200 V, Power/Power 50 V (EN 60664-1)
Protection	IP20
Connection	Screw terminal: single wire (0.2...2.5 mm <sup>2</sup> ), stranded wire (0.2...1.5 mm <sup>2</sup> )
Dimensions H×W×D	43×25×142 mm

#### Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85366990
EAN	4048879050487
eClass	27279219
Packaging unit	1.000