

MVP12 plastic DI16 IOL HUB

IO-Link Version 1.1

Compact module


IO-Link V1.1

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

Link to Product

Illustration

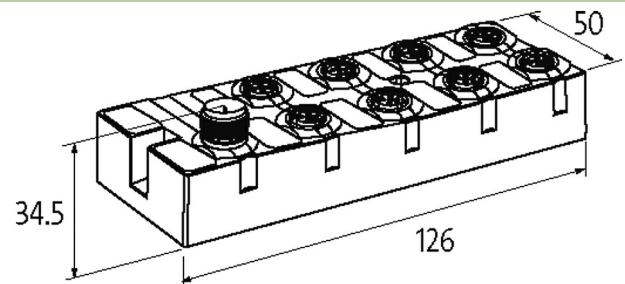

Product may differ from Image



General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C (storage temperature -40...+70 °C)
Protection	IP67
Dimensions HxWxD	126x50x34.5 mm

Input

Type	PNP (EN 61131-2) Type 3
Input filter	1 ms

IO-Link

Specification	IO-Link V1.1
Port Class	A
IO-Link	Device
Operating modes	COM2 (38.4 kbps)
Cycle time	2.3 ms

Parameterization

PIN 4	Input
PIN 2	Input

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85369010
EAN	4048879695688
eClass	27242604
Packaging unit	1.000