

## M12 ADAPTOR ON TOP OF MSUD VALVE PLUG FORM A 18MM

Form A (18 mm) – M12, connector top entry

24 V AC/DC  $\pm 25\%$

LED (yellow)


3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.



### [Link to Product](#)

#### Illustration

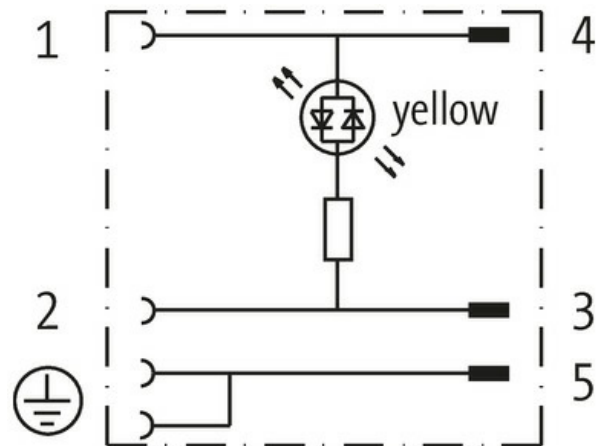

Female

Male

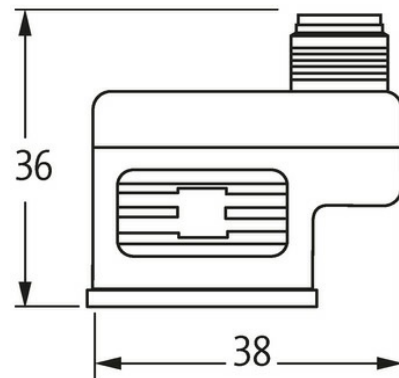

Depth: 27 mm

Product may differ from Image



#### Form

Form 41281

#### Technical Data

Operating voltage	24 V AC/DC $\pm 25\%$
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A

Material group	IEC 60664-1, category I
LED display	yellow
Locking of ports	M3/M12×1 mm (recommended torque 0.4/0.6 Nm)
Protection	IP67 inserted and tightened (EN 60529)
Configuration	2 contacts + bridged PE

**General data**

Mounting method	inserted, tightened
Pollution Degree	3
Temperature range	-25...+85 °C

**Commercial data**

country of origin	CZ
customs tariff number	85366990
EAN	4048879144711
eClass	27143423
Packaging unit	1.000