

MODLINK MSDD DATA INSERT

1xSUB-D25 female/female + 1xRJ45 + 1xRJ12

RJ45; RJ12; SUB-D25


1× RJ45, 8-pole metal, CAT5e (female/female)

1× RJ12 (6-pole plastic)

1× SUB-D25 (female/male)

Link to Product

Illustration

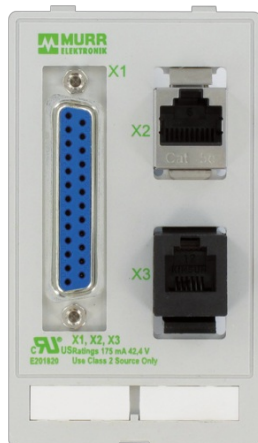

Product may differ from Image



General data

Dimensions HxWxD 88x51x25 mm

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

RJ12

Operating voltage	max. 48 V AC/DC
Connection front side	RJ12
Connection rear side	RJ12
Locking of ports	Snap In
Operating current	max. 1 A
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current (UL Rating)	max. 175 mA

SUB-D25

Locking of ports	UNC 4...40 bolt
Operating current	3 A
Connection rear side	SUB-D (male)

Connection front side	SUB-D (female)
Operating voltage	48 V AC/DC
Operating current (UL Rating)	max. 175 mA
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
No. of poles	25-pole

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879037693
eClass	27189217
Packaging unit	1.000