

## EXACT8, 10XM8, 3 POLE BASIC HOUSING

NPN-LED's

10-way, 3-pole

Inline face or side mounting


for NPN signals 24 V DC

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

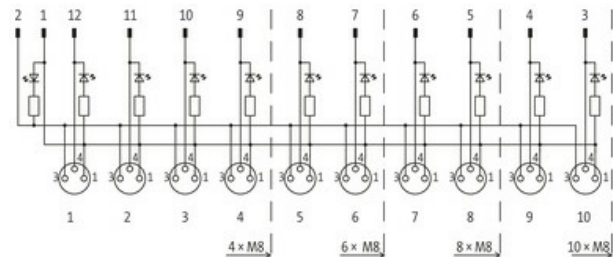

M8-Females 3-pole



for 1 signal per port

Product may differ from Image



#### Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 2 A
Protection	IP65/IP67
Total current	max. 8 A

#### General data

Temperature range	-20...+70 °C, depending on cable quality
-------------------	--

#### Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)

LED (green): Power / LED (yellow): (S1)

Commercial data	
country of origin	DE
customs tariff number	85369010
EAN	4048879057011
eClass	27279219
Packaging unit	1.000