

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24...230V LED PG9

Form A (18 mm) for pressure switch

24...230 V AC/DC

LED red (2) green (1)




PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

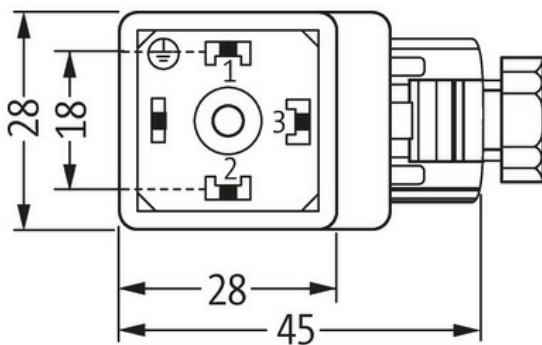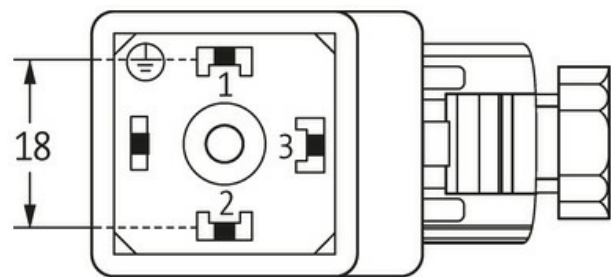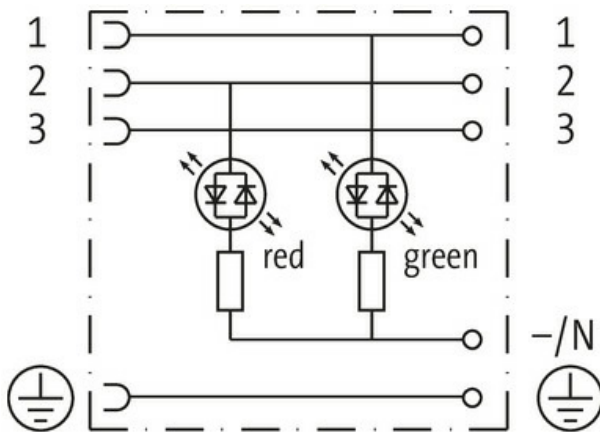

Height: 41 mm

Product may differ from Image

Form

Form 29341

Technical Data

Operating voltage	24...230 V AC/DC
Operating current per contact	max. 4 A
Current consumption	24 V: approx. 40 mA; 110 V: approx. 3 mA; 230 V: approx. 6 mA
LED display	red (2) green (1)
Locking of ports	M3 (recommended torque 0.4 Nm)
Compression gland	PG9; (PG11, NPT 1/2" on request)
Connection cross section	1.5 mm ² (with ferrule end)

Sealing range (cable Ø)	6...8 mm
Protection	IP65 inserted and tightened (EN 60529), with gland

General data

Temperature range	-20...+60 °C
-------------------	--------------

Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879187473
eClass	27279221
Packaging unit	1.000