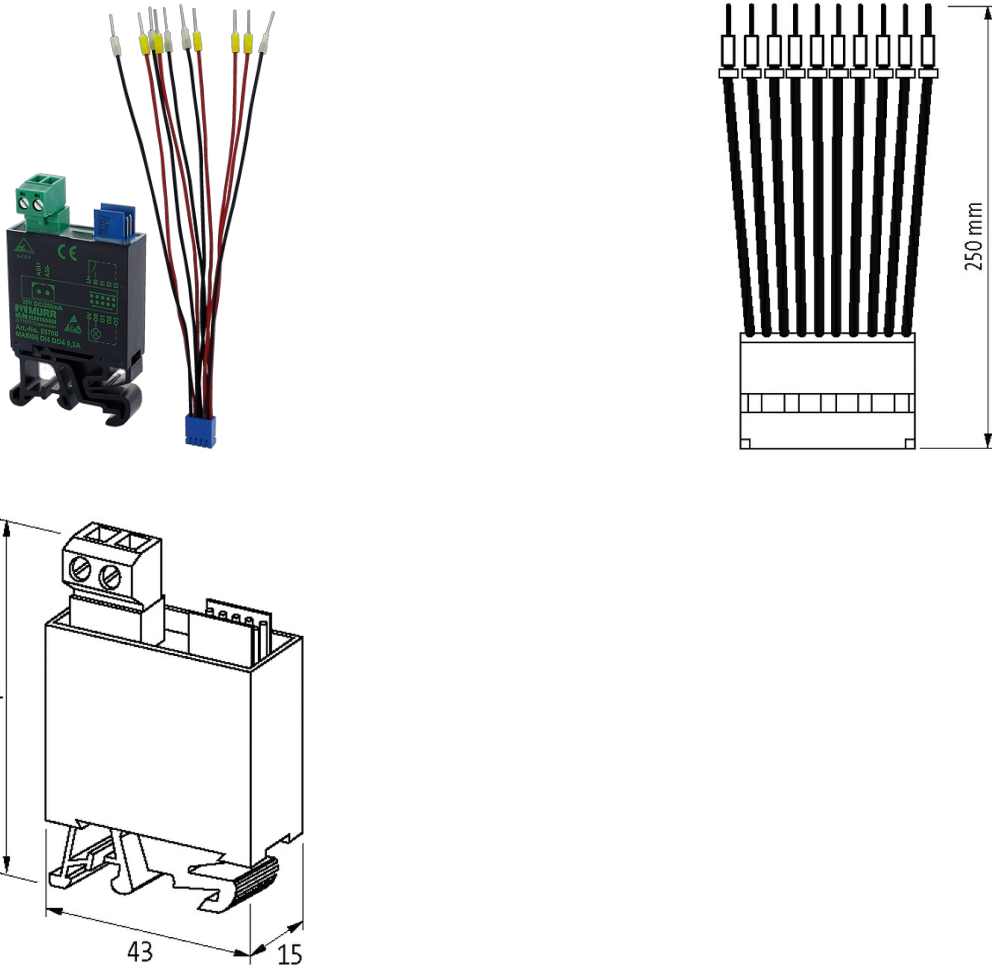


MASI00 55701 WITH CONNECTION CABLE

4 digital inputs , 4 digital output, AB-Slave,

Digital inputs/outputs
DI4/DO4 - 0.2 A (AB)
I/O cable 250 mm
IP00

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

Bus voltage (AS-Interface)	26.5...31.6 V DC
Total current (AS-Interface)	max. 250 mA
Addressing	1...62 (1...31 A or B) via plug-in terminal
Address range	1...62 (1...31 A or B)
Profile (IO/ID/ID2 code)	S-7.A.7

General data

Protection	IP00
Mounting method	DIN-rail mountable (EN 60715)
Connection AS-Interface	Screw plug-in terminal: 0.2...2.5 mm ²
Temperature range	0...+55 °C (storage temperature -20...+70 °C)

Dimensions H×W×D 43×15×81 mm

Output

Switching current per output	max. 30 mA (short-circuit and overload protected)
Total current	max. 120 mA
Switch off time in case of short circuit	approx. 50 ms

Input

Sensor supply US	max. 200 mA from AS-Interface (short-circuit and overload protected)
Type	for standard switches

Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Monitoring - no voltage	yes

Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879450836
eClass	27242604
Packaging unit	1