



Illuminated Emergency-stop pushbutton with 2 positive opening contacts

in a IP65 enclosure


E-Stop 72 2NC L M12(8)
with M12 connection
8-pole
Emergency-Stop button
2 NC (positively-opening)
LED-Ring can be lit

[Link to Product](#)

Illustration

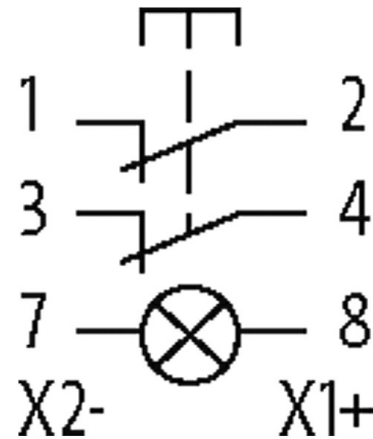

PIN 1: N/C 1
PIN 2: N/C 1
PIN 3: N/C 2
PIN 4: N/C 2
PIN 5: n.c.
PIN 6: n.c.
PIN 7: (X2/-)
PIN 8: (X1/+)

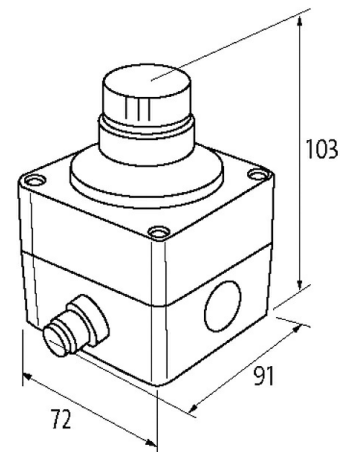

Product may differ from Image

Technical Data

Contact bounce time	max. 9 ms
Switching capacity	30 A (AC 15); 2.2 A (DC 13)
LED Light	12...30 V AC/DC typ. 15 mA (24 V AC/DC)

General data

Mounting method	screw fixing
Material (contact)	Ag Ni
Temperature range	-25...+60 °C (storage temperature -25...+85 °C)
Lambda (d)	20% (N/C)
B10d	250 000

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Mech./ elect. life	1 000 000 operations, load-temperature dependent
Protection	IP65
Connection	M12 (8-pole)
Dimensions H×W×D	103×72×91 mm

Contact Layout

PIN 1	N/C 1
PIN 2	N/C 1
PIN 3	N/C 2
PIN 4	N/C 2
PIN 5	n.c.
PIN 6	n.c.
PIN 7	(X2/-)
PIN 8	(X1/+)

Utilization category

AC-15	3 A (250 V AC)
DC-13	2 A (24 V DC)

Commercial data

country of origin	DE
customs tariff number	85365080
EAN	4048879594813
eClass	27371244
Packaging unit	1.000