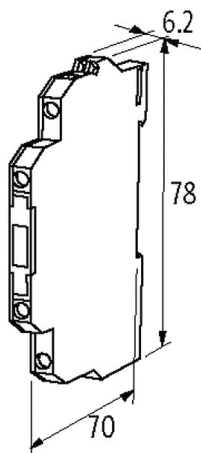


MIRO TH 110VAC/DC SK OPTO-COUPLER MODULE

IN: 130 VAC/DC - OUT: 250 VAC / 0,5A

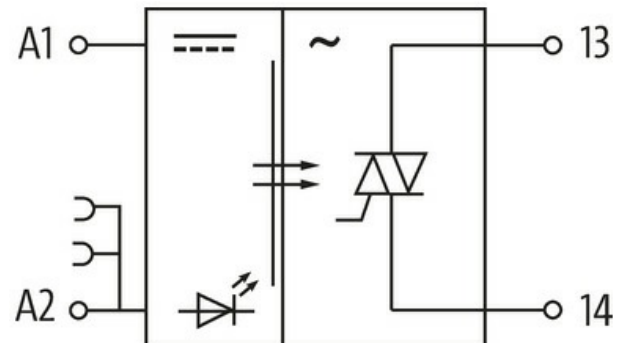
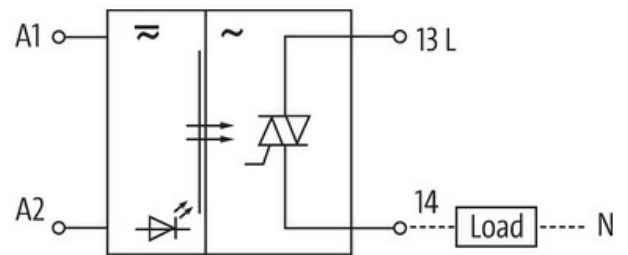
Triac 0.5 A
110 V AC/DC
Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

Output

Leakage current (output is open)	max. 0.3 A
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.5 V AC
Switching voltage	12...250 V AC
Switching frequency	max. 20 Hz, depending on suppression
Switching current per output	2 mA...0.5 A

Input

Control current	3.5 mA
Voltage range OFF	0...35 V AC/DC
Voltage range ON	70...130 V AC/DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879026765
eClass	27371604
Packaging unit	1.000