


MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 800VA IN: 240-415VAC OUT: 110-110-20VAC

Single-phase - Control and Isolation Transformers
800 VA
Spring clamp terminals
Isolation class T 60/B

[Link to Product](#)

Illustration

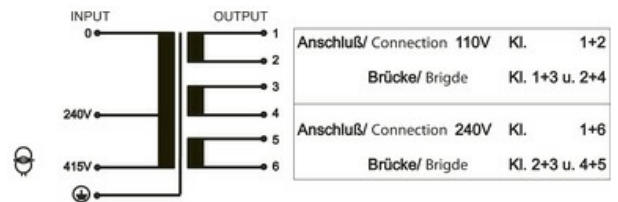

Product may differ from Image



General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	92×135×7 mm

Dimensions H×W×D 118×174×148 mm

Output

Output voltage 110/240 V AC

Output rating 800 VA

Input

Input voltage 240/415 V AC

Inrush current 92.8 A (240 V AC); 49.12 A (415 V AC)

Short-circuit current 87.8 A (240 V AC); 50.4 A (415 V AC)

Input current 3.75 A (240 V AC); 2.15 A (415 V AC)

Frequency 50...60 Hz

Commercial data

country of origin CZ

customs tariff number 85043180

EAN 4048879066402

eClass 27031302

Packaging unit 1.000