

MOSA M12 MALE 0° FIELD-WIREABLE (IDC)A-cod., 4-pol., 0,14-0,34mm², shielded

Male straight
M12, 4-pole
IDC terminals


Connection cross section: 0.14...0.34 mm²

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

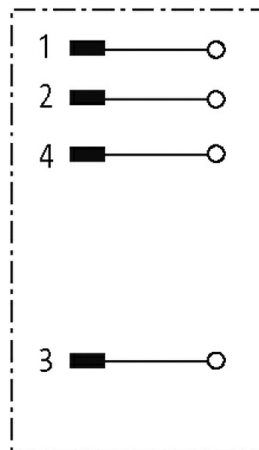

Product may differ from Image

**Form**

Form 12551

Technical Data

Operating voltage max. 50 V AC/DC

Operating current per contact max. 4 A

Connection cross section	0.14...0.34 mm ² (conductor diameter min. 0.1 mm)
Sealing range (cable Ø)	5.5...7.2 mm
Wire isolation	PVC, PP
Outer wire Ø	1.2...1.6 mm
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range	-25...+85 °C
Dimensions HxWxD	52x19.5x19.5 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879306027
eClass	27279221
Packaging unit	1