


## M12 MALE BUS TERMINATING PLUG FOR DEVICENET



DeviceNet, CANopen  
Terminating resistor  
Male  
M12 – M12, 5-pole (circuit diagram)  
A-coded

### [Link to Product](#)


#### Illustration

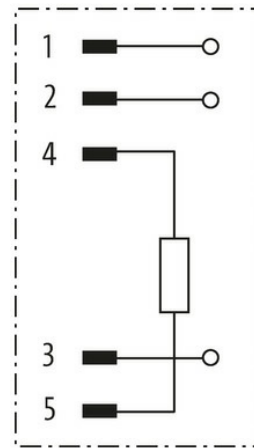

## Male

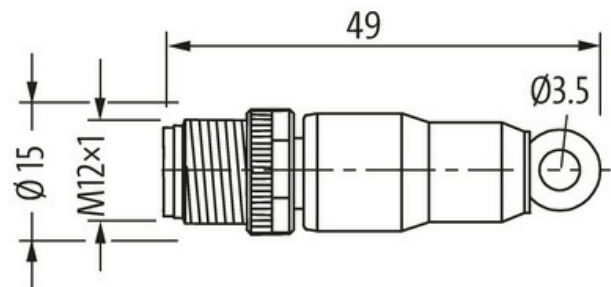

Product may differ from Image



#### Form

Form 13461

#### Technical Data

Operating voltage	max. 30 V DC
Operating voltage (only UL listed)	max. 30 V DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A

No. of poles	5
Material group	IEC 60664-1, category I
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Material	PUR
Locking material	Zinc die casting, matte nickel plated

**General data**

Pollution Degree	3
Temperature range	-25...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85332100
EAN	4048879198769
eClass	19070403
Packaging unit	1.000