



## Managed Switch 8x10/100BT 2x10/100/1000BT IP67 Metal M12

### [Link to Product](#)


#### Illustration




## Female

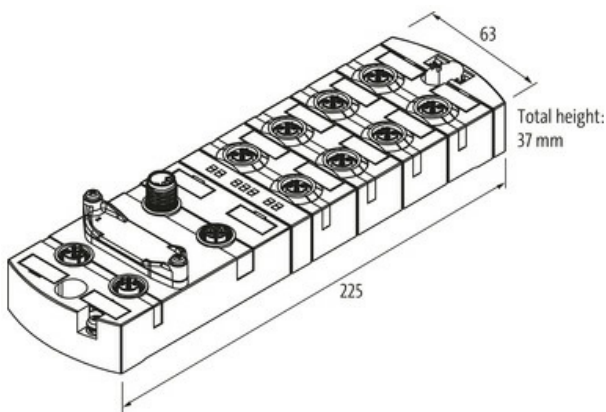

## Male



## Female



Product may differ from Image

#### Technical Data

Operating voltage	9...36 V
Transfer rate	10/100/1000 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

#### General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal
Protection	IP67
Dimensions HxWxD	37x63x225 mm

#### Connections

Fieldbus	2x M12 (female), X-coded; 8x M12 (female), D-coded
Supply	2x M12 Power, 5-pole, L-coded, 2x max. 16 A

#### Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes

Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Websver	HTTP, HTTPS
Switch Form	Managed Switch
<b>Diagnostic</b>	
Communication status	via LED, LLDP
Monitoring - no voltage	yes
<b>Commercial data</b>	
country of origin	DE
customs tariff number	85176200
EAN	4048879862561
Packaging unit	1.000