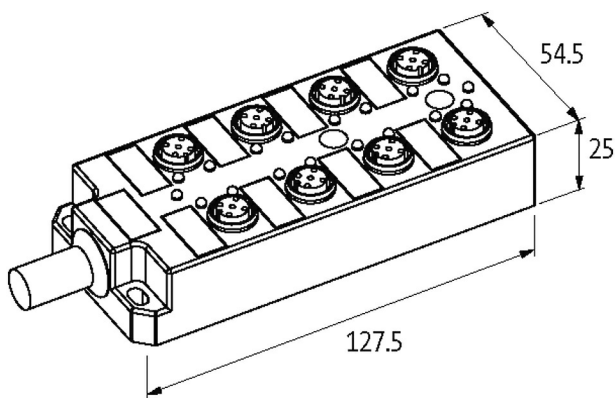
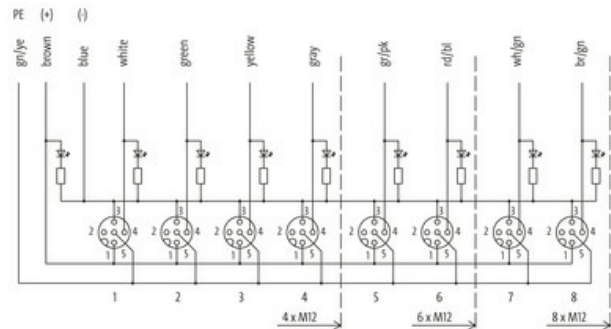
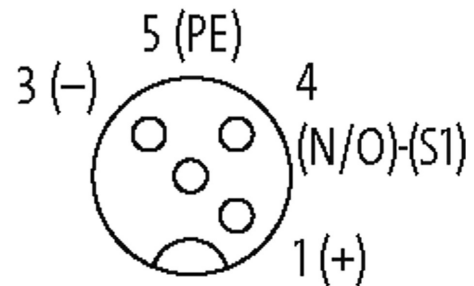


MVP XTREME 8XM12, 4 POLE FIXED CABLE

25m PUR, 8x0.5+3x1.0, bl halogen free UL/CSA

25.0 m

[Link to Product](#)**Illustration****M12 Females 4-pole**

Product may differ from Image

Technical Data

| | |
|-------------------------------|--|
| Operating voltage | 24 V DC |
| Operating current per contact | max. 4 A |
| Locking of ports | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Protection | IP65, IP67, IP68 |
| Housing | Plastic housing |

General data

| | |
|-------------------|--------------|
| Temperature range | -30...+85 °C |
|-------------------|--------------|

Cables

| | |
|----------------------------|---------------------------------|
| No./diameter of wires | 8× 0.5 + 3× 1.0 mm ² |
| C-track properties | 2 Mio. |
| Outer Ø | 8.3 mm ±5% |
| Cable number | 445 |
| Approval (cable) | UL (AWM-Style 20233), CSA |
| Jacket Color | black |
| Temperature range (fixed) | -40...+80 °C |
| Temperature range (mobile) | -40...+60 °C |

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

| | |
|----------------------|------------------|
| Bend radius (fixed) | 5× outer Ø |
| Bend radius (moving) | 10× outer Ø |
| Torsion stress | 0.5 Mio. ±180°/m |
| Material (jacket) | PUR (UL/CSA) |

Contact Layout

| | |
|-------|---|
| PIN 1 | (+) |
| PIN 3 | (-) |
| PIN 4 | (NO)/(S1) |
| PIN 5 | (Earth) |
| | LED (green): Power / LED (yellow): (S1) |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85444290 |
| EAN | 4048879314985 |
| eClass | 27143423 |
| Packaging unit | 1.000 |