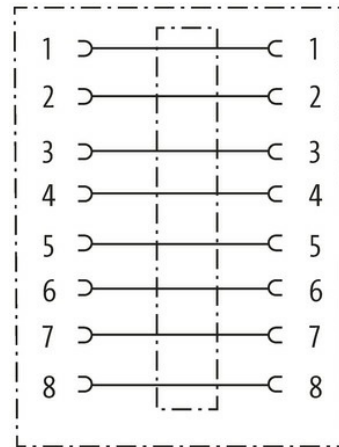



**M12 gender-changer female/female 8pole x-cod**

for ethernet



Ethernet CAT6A  
Control cabinet entry system  
Female - female  
M12, 8-pole  
X-coded  
shielded

[Link to Product](#)**Illustration**


Female



Female

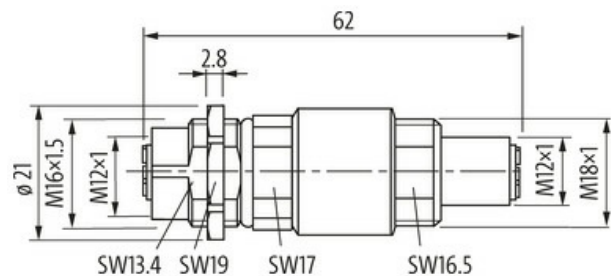

Product may differ from Image

**Form**

Form 51521

**Technical Data**

Operating voltage	max. 50 V AC/60 V DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 0.5 A

Transfer parameters	CAT6, Class EA (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	Gigabit
Material group	IEC 60664-1, category III
Coding	X-coded
Locking of ports	Screw thread (M12×1 mm)
Compression gland	M16 (SW19)
Protection	IP67 inserted and tightened (EN 60529)
Material	Brass, nickel plated

**General data**

Standards	DIN EN 61076-2-109 (M12)
Temperature range	-40...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879657693
eClass	27279220
Packaging unit	1.000