

### adaptor M8 male 3p./M12 fem. 3p. conf. 1,3,4 Lite

Adapter

Male - female




M8 – M12, 3-pole

for M8 distribution box 3-pole

7005 - plastic hexagonal screw (M12/M8 Lite)

#### [Link to Product](#)

#### Illustration

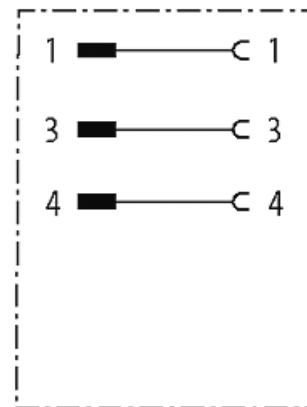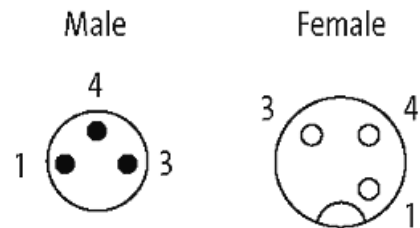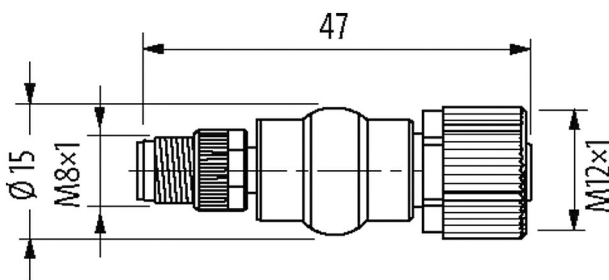

Product may differ from Image



#### Form

Form 88521

#### Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category I
Locking of ports	Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing
Compression gland	M8 (SW9), M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	PA

Material PUR

**General data**

Temperature range	-25...+85 °C
Test isolation voltage	0.8 kV eff/rms
Pollution Degree	3

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879618571
eClass	27279218
Packaging unit	1