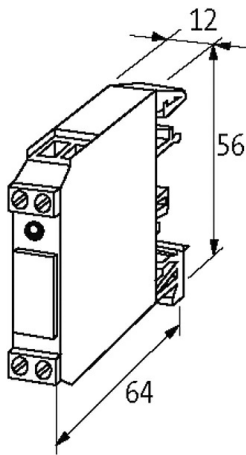
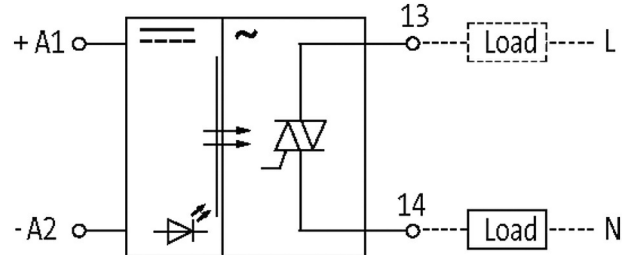


AMMS 20-47/1 OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 250 VAC / 1 A

Triac 1 A
24 V DC[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	56x12x64 mm

Output

Leakage current (output is open)	max. 5 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.3 V AC
Switching voltage	24...253 V AC
Switching frequency	max. 20 Hz
Switching current per output	50 mA...1 A

Input	
Voltage range OFF	0...3 V DC
Voltage range ON	10...53 V DC
LED display	LED (red)
Input current	6.6 mA
Commercial data	
country of origin	CZ
customs tariff number	85414900
EAN	4048879028073
eClass	27371604
Packaging unit	1.000