

**MIIW ANALOG COUPLER COMPONENT**

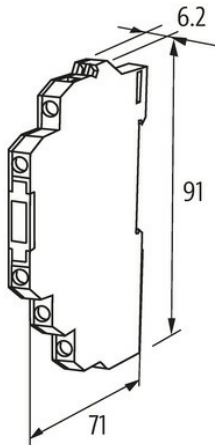
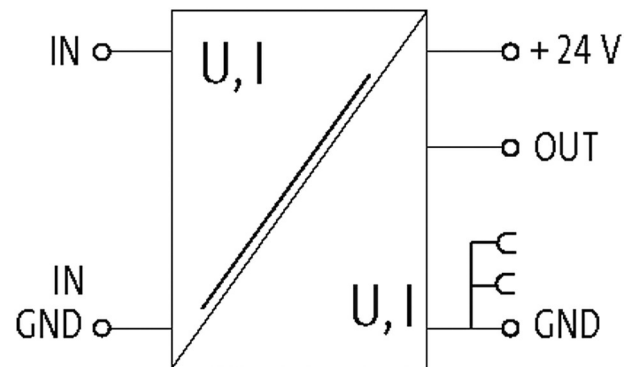
IN: 0(4)..20 mA - OUT: 0(4)..20 mA

INPUT: 0...20 mA

OUTPUT: 0...20 mA

Screw terminals

Input and output galvanically separated

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC $\pm$ 20%, smoothed
Operating current	50...70 mA
Frequency	max. 500 Hz

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+50 °C (storage temperature -40...+80 °C)
Test isolation voltage	1.5 kV
Dimensions H×W×D	91×6.2×71 mm

**Voltage output signals**

Load	max. 25 mA
------	------------

**Current outputs**

Load	max. 500 $\Omega$
------	-------------------

**Commercial data**

country of origin	CZ
customs tariff number	85437090
EAN	4048879028431
eClass	27210990
Packaging unit	1.000