

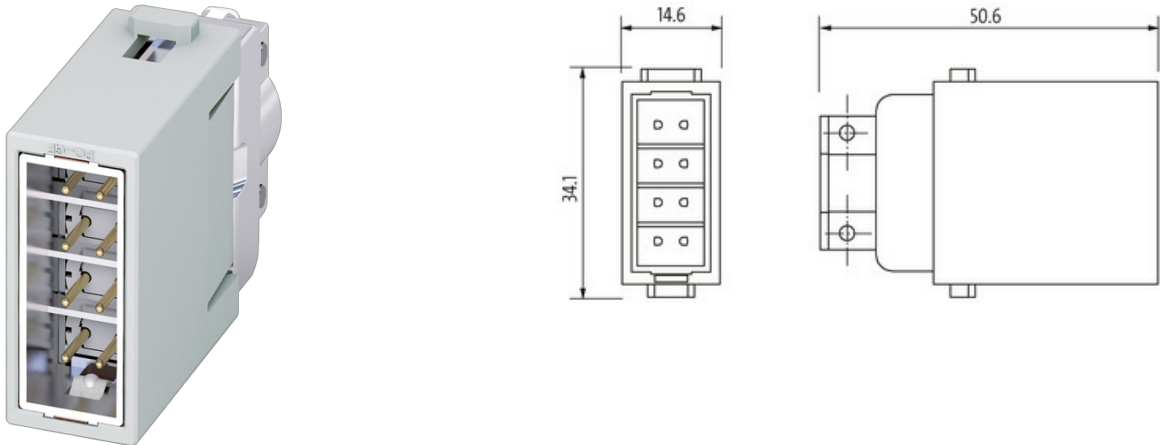
GBIT module - male, crimp t.

Male

Gigabit

Technical data will be only guaranteed with Murrelektronik components.

The clip 70MH-ZZ100-0000000 is needed (2x)

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	50 V AC/DC
Rated surge voltage	0.8 kV
Operating current	5 A
No. of poles	8
Transfer parameters	CAT6A
Mating cycles	min. 500
Connection	Crimp
Connection cross section	0.08...0.5 mm ² (AWG 28...20)
Stripping length	4.2 mm
Over voltage category	III
Wire-Ø incl. isolation	5...7 mm

General data

Pollution Degree	3
Temperature range	-40...+85 °C
No. of module positions	1
Flammability class	V-0 (acc. to UL 94)
Type	Male
Material (module)	PC
Dimensions HxWxD	50.4x34.1x14.6 mm

Commercial data

country of origin	CZ
customs tariff number	85389099

EAN	4048879664028
eClass	27143424
Packaging unit	1.000