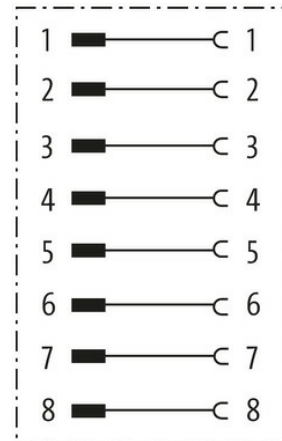
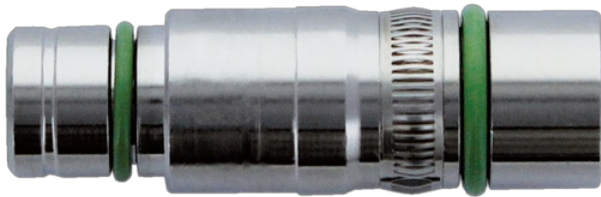



MODL.VARIO insert for coupling housing type B

8-pole M12, female, shielded


Insert - mobile housing
 Female straight – male straight
 M12, 8-pole
 A-coded

[Link to Product](#)**Illustration**

Male



Female



Product may differ from Image

Form

Form 48116

Technical Data

Operating voltage	max. 30 V AC/DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 2 A
Coding	A-coded
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M12
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	Brass, nickel plated

General data

Temperature range	-25...+85 °C
Test isolation voltage	0.8 kV eff/rms

Gasket FKM

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879576543
eClass	27279221
Packaging unit	1.000