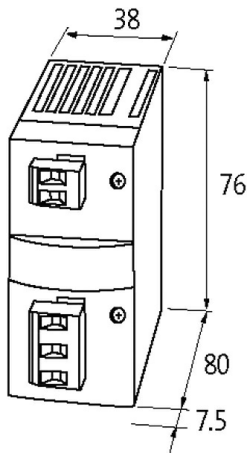
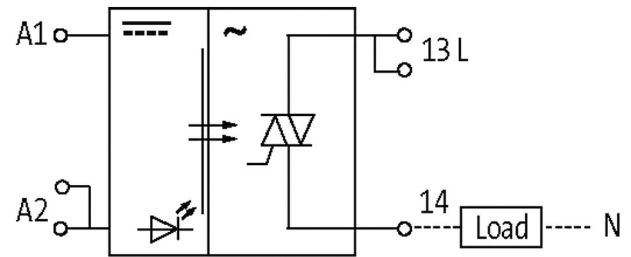


**MIRO TRIAC 1X400VAC-10A**

IN: 53 VDC - OUT: 400 VAC / 10 A

Triac 10 A  
24 V DC  
Screw plug-in terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Housing	Black plastic, flame retardant
Dimensions HxWxD	76x38x80 mm

**Output**

Surge current	70 A
Leakage current (output is open)	max. 1 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 0.15 V AC
Switching voltage	12...400 V AC
Switching frequency	max. 20/1 Hz (resist./ind.)

Switching current per output 100 mA/10 A (no derating)

**Input**

Control voltage	24 V DC
Control current	approx. 7.8 mA
Voltage range OFF	0...3 V DC
Voltage range ON	10...53 V DC
LED display	LED (green)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879020985
eClass	27371604
Packaging unit	1.000