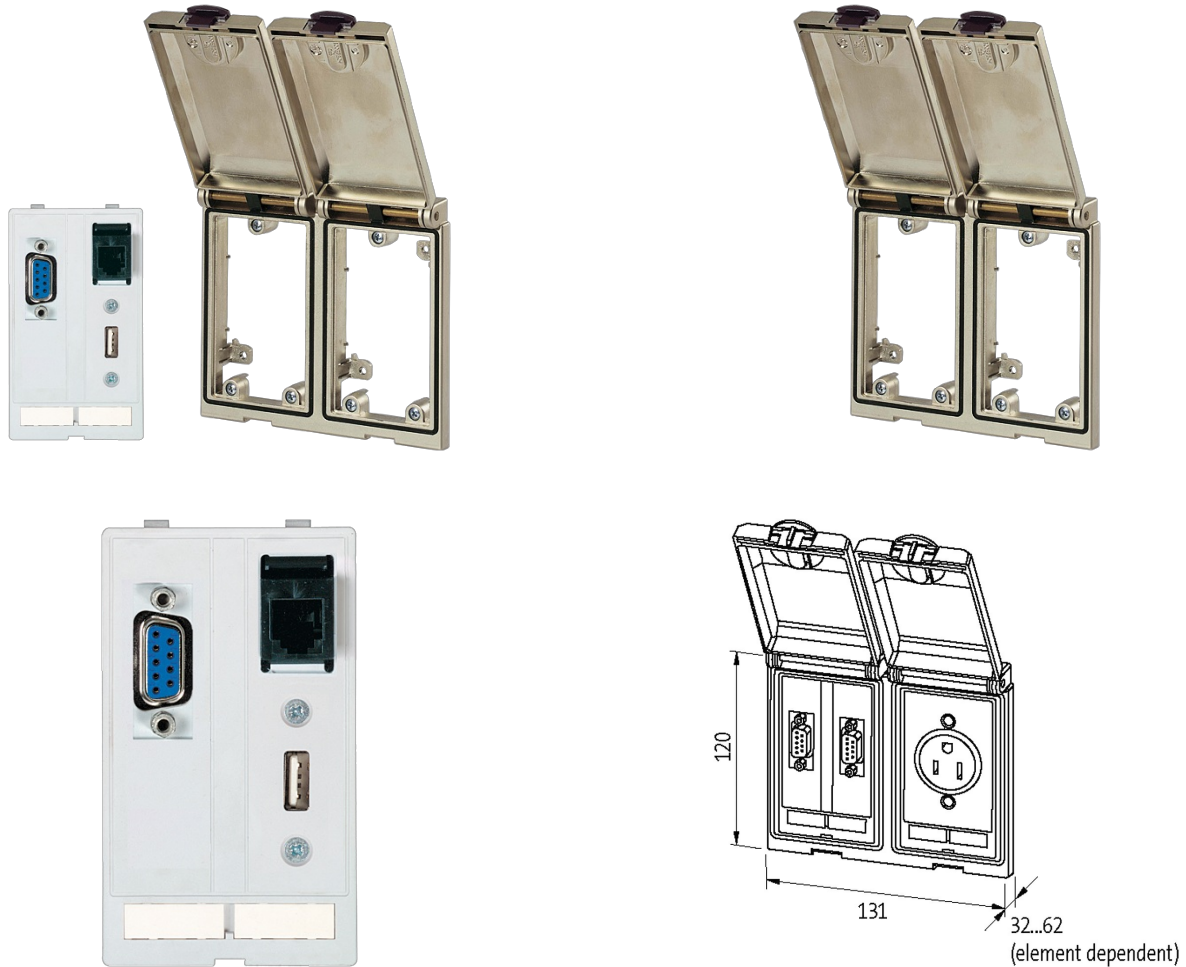


**Modlink MSDD-set: Frame 4000-68123-0000000,**

insert 4000-68000-1480000

[Link to Product](#)**Illustration**

Product may differ from Image

**Frame**

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Housing	Zinc die-casting, with surface finishing
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)

**SUB-D9**

Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
Operating current (UL Rating)	max. 175 mA
No. of poles	9-pole
Connection front side	SUB-D (female)
Connection rear side	SUB-D (female)
Locking of ports	UNC 4...40 bolt

**RJ12**

Operating voltage	max. 48 V AC/DC
-------------------	-----------------

Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	max. 1 A
Operating current (UL Rating)	max. 175 mA
Connection front side	RJ12
Connection rear side	RJ12
Locking of ports	Snap In

**USB**

Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	42.4 V DC
Operating current	max. 500 mA
Locking of ports	Snap In
Specification	USB: 2.0 (max. 480 Mbit/s)

**Shielding plate**

Connection	Threaded hole M4
Tightening torque	0.9 Nm $\pm$ 0.1

**Commercial data**

country of origin	CZ
customs tariff number	85389099
EAN	4048879033718
eClass	27189217
Packaging unit	1