

MVP12-P6 DI16 8xM12A IOLA12 B0

IO-Link Class A Hub

IO-Link hub in 50 mm plastic housing

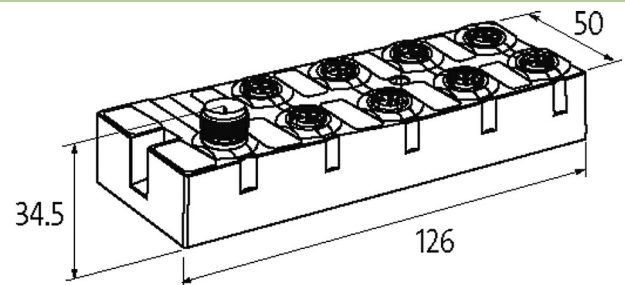
1 × M12 IO-Link Class A

8 × M12 I/O

16 digital inputs

Preconfigured parameter range

Connection cables are in the online shop under "Connection Technology".

Link to Product**Illustration**

Product may differ from Image

Technical Data

Installation height	max. 3000 m above sea level
Operating voltage (US)	24 V DC (18...30 V DC)
	max. 4 A
Current consumption	max. 40 mA
LED display	US-IOL: sensor power supply IOL (green: OK)

General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C (storage temperature -40...+85 °C)
Protection	IP68
Dimensions HxWxD	126x50x34.5 mm

Input

Type	Type 1 + type 3
Input filter	1 ms
	24 V DC (EN 61131-2), max. 0.5 A, short-circuit and overload-protected

IO-Link

Specification	IO-Link V1.1.2, compatible with: IO-Link V1.1.3
Port Class	A
IO-Link	Device
Operating modes	COM3 (230.4 kBaud)
Cycle time	min. 1 ms
	2 bytes (inputs)

Parameterization

PIN 4	Input (port X0...X7)
PIN 2	Input (port X0...X7)

Connections

IO-Link	M12, 3-pin, A-coded
I/O ports	M12, 5-pole, A-coded

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes

Commercial data

country of origin	DE
customs tariff number	85389099
EAN	4048879872089
eClass	27242604
Packaging unit	1.000