

B24 frame (female) for 6 modules

a...f

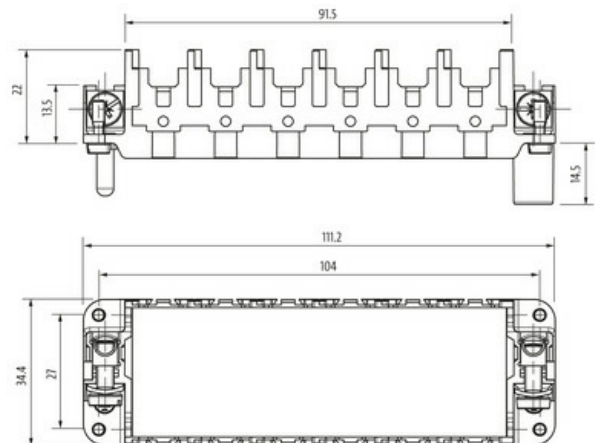
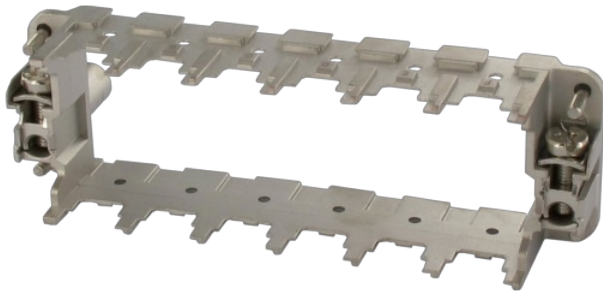
B24

Frame

Female

for 6 modules

Technical data will be only guaranteed with Murrelektronik components.

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

| | |
|--------------------------------|---|
| No. of poles | 2 PE |
| Connection | Screw terminal |
| Connection cross section | 1...6 mm ² (AWG 18...10) |
| Mating cycles (frame) | min. 500 |
| Insertion and withdrawal force | < 60 N |
| Mating cycles (safety element) | min. 20 |
| Holding force (PE contact) | 250 N |
| Contact resistance | ≤ 5 mΩ |
| Holding force (modules) | ≥ 300 N (when stuck) ≥ 600 N (when pulling) |

General data

| | |
|----------------------------|---------------------------------|
| Material (contact) | Brass |
| Material (contact surface) | Ni |
| Temperature range | -40...+125 °C |
| No. of module positions | 6 |
| Flammability class | V-0 (acc. to UL 94) |
| Material (safety element) | PC GF |
| Size | B24 |
| Material (frame) | Zinc die casting, nickel-plated |
| Climatic category | 40/125/10 |
| Frame type | Female |
| Dimensions H×W×D | 36.5×34.4×111.2 mm |

Commercial data

| | |
|-----------------------|----------|
| country of origin | CZ |
| customs tariff number | 85389099 |

| | |
|----------------|---------------|
| EAN | 4048879641814 |
| eClass | 27143424 |
| Packaging unit | 1.000 |