

Main

Product or component type	Passive filter
Product specific application	Reduction of current harmonics

Complementary

Range compatibility	Altivar 61 Altivar 71
[Us] rated supply voltage	400 V (+/- 10 %)
Power supply frequency	50 Hz (tolerance: +/- 5 %)
Quantity per drive	1 filter per drive for ATV71WU30N4 1 filter per drive for ATV71WU22N4 1 filter per drive for ATV71WU15N4 1 filter per drive for ATV71W075N4 1 filter per drive for ATV71PU30N4Z 1 filter per drive for ATV71PU22N4Z 1 filter per drive for ATV71PU15N4Z 1 filter per drive for ATV71P075N4Z 1 filter per drive for ATV71HU30N4 1 filter per drive for ATV71HU22N4 1 filter per drive for ATV71HU15N4 1 filter per drive for ATV71H075N4 1 filter per drive for ATV61WU30N4C 1 filter per drive for ATV61WU30N4 1 filter per drive for ATV61WU22N4C 1 filter per drive for ATV61WU22N4 1 filter per drive for ATV61WU15N4C 1 filter per drive for ATV61WU15N4 1 filter per drive for ATV61W075N4C 1 filter per drive for ATV61W075N4 1 filter per drive for ATV61HU30N4 1 filter per drive for ATV61HU22N4 1 filter per drive for ATV61HU15N4 1 filter per drive for ATV61H075N4
[In] rated current	6 A
Network number of phases	3 phases


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

THDI	16 % for ATV71WU30N4 motor: 3 kW 16 % for ATV71WU22N4 motor: 2.2 kW / 3 hp 16 % for ATV71WU15N4 motor: 1.5 kW / 2 hp 16 % for ATV71W075N4 motor: 0.75 kW / 1 hp 16 % for ATV71PU30N4Z motor: 3 kW 16 % for ATV71PU22N4Z motor: 2.2 kW / 3 hp 16 % for ATV71PU15N4Z motor: 1.5 kW / 2 hp 16 % for ATV71P075N4Z motor: 0.75 kW / 1 hp 16 % for ATV71HU30N4 motor: 3 kW 16 % for ATV71HU22N4 motor: 2.2 kW / 3 hp 16 % for ATV71HU15N4 motor: 1.5 kW / 2 hp 16 % for ATV71H075N4 motor: 0.75 kW / 1 hp 16 % for ATV61HU30N4 motor: 3 kW 16 % for ATV61HU22N4 motor: 2.2 kW / 3 hp 16 % for ATV61HU15N4 motor: 1.5 kW / 2 hp 16 % for ATV61H075N4 motor: 0.75 kW / 1 hp 10 % for ATV61WU30N4C motor: 3 kW 10 % for ATV61WU30N4 motor: 3 kW 10 % for ATV61WU22N4C motor: 2.2 kW / 3 hp 10 % for ATV61WU22N4 motor: 2.2 kW / 3 hp 10 % for ATV61WU15N4C motor: 1.5 kW / 2 hp 10 % for ATV61WU15N4 motor: 1.5 kW / 2 hp 10 % for ATV61W075N4C motor: 0.75 kW / 1 hp 10 % for ATV61W075N4 motor: 0.75 kW / 1 hp
Max current	1.5 x nominal current
Efficiency	98 %
Cos phi	0.99 at 100 % of line current 0.85 at 75 % of line current 1 at 150 % of line current
Electrical connection	Terminal, connection capacity: 16 mm ²
Electrical insulation class	Class F
Product weight	15 kg

Environment

IP degree of protection	IP20
Relative humidity	5...85 % without condensation
Ambient air temperature for operation	5...40 °C without current derating > 40...55 °C with current derating 3 % per °C
Ambient air temperature for storage	> -25...55 °C
Operating altitude	> 1000...4000 m with current derating 5 % per 1000 m

Dimensions

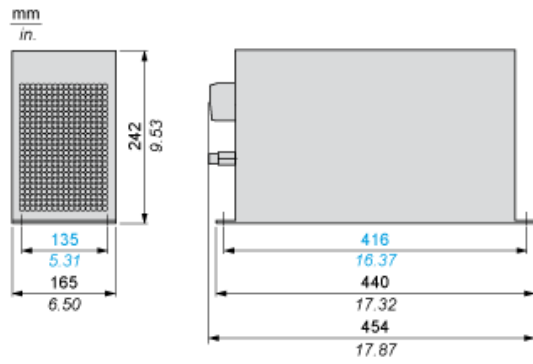

Mounting Recommendations

Vertical Mounting Only

