

## AS-I AND 2X AUX. POWER DISTRIBUTER FOR MASI68

MASI68 passive distribution box

2× Aux. Power



7/8"

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

### [Link to Product](#)

#### Illustration

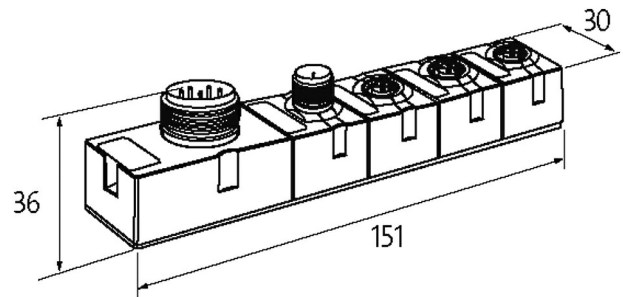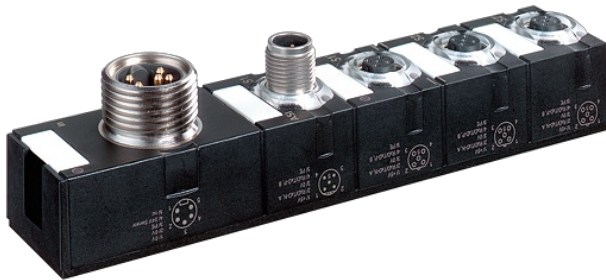

Product may differ from Image



#### Technical Data

Bus voltage (AS-Interface)	26.5...31.6 V DC
External supply	24 V DC external (18...30.2 V DC) EN 61131-2, 2× separately aux power
Current via M12 port	max. 4 A
Total current	max. 2× 8 A

#### General data

Protection	IP68
Mounting method	2-hole screw mounting
Temperature range	-20...+60 °C (storage temperature -20...+70 °C)
Dimensions H×W×D	151×30×34.5 mm

#### Connections

Fieldbus	A-coded
I/O ports	M12, 5-pole

#### System connection

Communication and module supply	via AS-Interface system connection
---------------------------------	------------------------------------

#### Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879373517
eClass	27279219
Packaging unit	1