



MICO FUSE 24 LED FUSE HOLDER 5X20MM 8 CHANNELS

IN: 24 V DC OUT: 24 V / 6 A

MICO FUSE 24 LED
8 channels
Total current: max. 40 A

[Link to Product](#)

Illustration

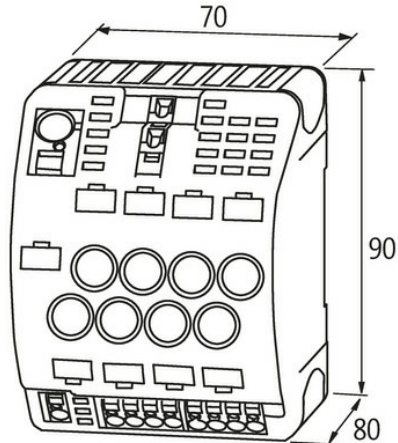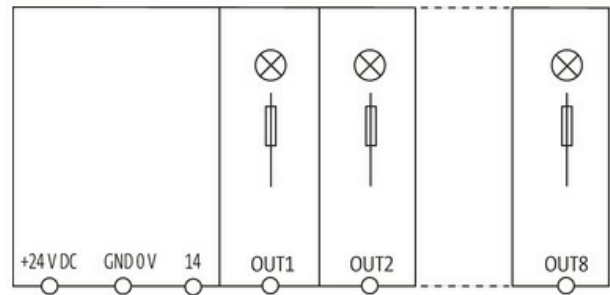

Product may differ from Image



Technical Data

Operating voltage	24 V DC (18...30 V DC)
Operating current	max. 6 A (40 °C)
Total current	max. 40 A

General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C

Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Output terminals	1× 0.5...4 mm ²
Input terminals	1× 16 mm ²
Alarm terminals	2.5 mm ²

Control outputs

Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
--------------------	---

Commercial data

country of origin	CZ
customs tariff number	85363030
EAN	4048879335263
eClass	27371802
Packaging unit	1.000