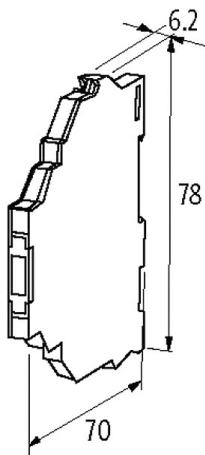
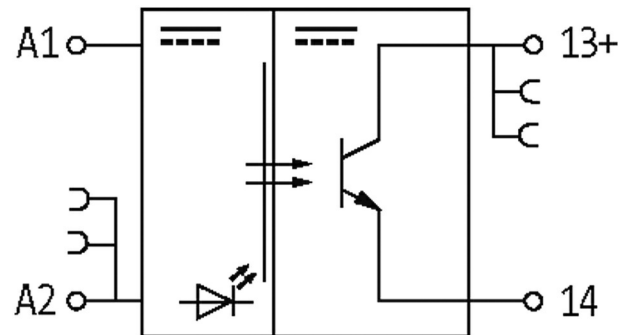


MIRO TR 24VDC 24VDC 10A FK OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 10 A

Transistor 10 A
 24 V DC
 short-circuit and overload protected
 pulse switching
 Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Output

Leakage current (output is open)	max. 25 μ A
Switching time ON/OFF	2/5 ms (10 A load)
Saturation voltage (across output)	max. 0.12 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 1/0.1 Hz (resist./ind.)
Switching current per output	1 mA...10 A, short-circuit and overload protected (pulse switching)

Input

Control current	10 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879021739
eClass	27371601
Packaging unit	1.000