



Main

Product or component type	Sinus filter
Range compatibility	Altivar 61 Altivar 71
Product specific application	Output filter
[In] rated current	180 A
Thermal losses	400 W at 100 Hz
Product compatibility	ATV61HD30M3X ATV61HD37M3X ATV61HD45M3X ATV61HD55N4 ATV61HD75N4 ATV61WD55N4 ATV61WD55N4C ATV61WD75N4 ATV61WD75N4C ATV71HD30M3X ATV71HD37M3X ATV71HD45M3X ATV71HD55N4 ATV71HD75N4 ATV71WD55N4 ATV71WD75N4
Switching frequency	4...8 kHz
Output frequency	0...100 Hz
Maximum permissible voltage	500 V AC

Complementary


Motor cable length	\leq 1000 m P motor 55...75 kW at 400 V
Electrical connection	Terminal, connection capacity: 95 mm ² (AWG 4/0) 20 N.m
Voltage drop at rated load	$<$ 10 %
Max current	1.5 x nominal current for 60 s
Product weight	120 kg

Environment

IP degree of protection	IP20
Environmental characteristic	3S1 conforming to IEC 721-3-3 3C2 conforming to IEC 721-3-3 3B1 conforming to IEC 721-3-3
Pollution degree	2 conforming to EN 50178
Vibration resistance	1.5 mm peak to peak (f = 3...13 Hz) conforming to IEC 60068-2 1 gn (f = 13...200 Hz) conforming to IEC 60068-2
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative humidity	\leq 95 %
Ambient air temperature for operation	-10...40 °C without current derating > 40...50 °C with current derating 1.5 % per °C
Ambient air temperature for storage	-40...65 °C
Operating altitude	1000...3000 m with current derating 1 % per 100 m \leq 1000 m without current derating

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions

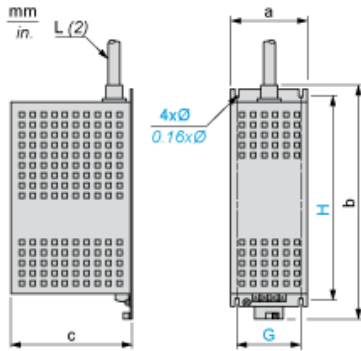

(2) Length of the cable integrated in the sinus filter


Dimensions in mm

a	b	c	G	H	Ø	L (2)
310	1060	375	220	880	11	2700

Dimensions in in.

a	b	c	G	H	Ø	L (2)
12.20	41.73	14.76	8.66	34.64	0.43	106.30

Mounting Recommendations

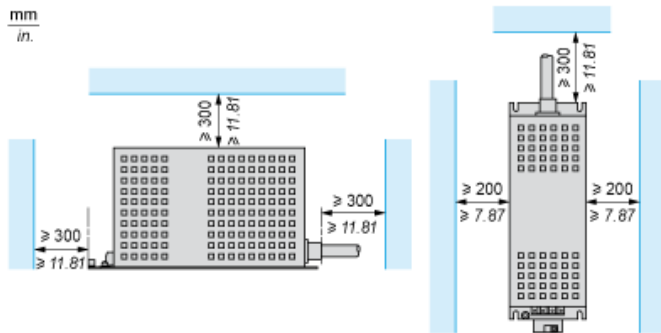

Sinus filters emit considerable heat and must not be placed underneath the drive