


## Mico Pro electronic circuit protection, 2 channels

IN: 24 V DC OUT: 24 V DC / 6 A

Mico Pro® fix 2.6  
2 channels  
Current adjustment 6 A  
Build your own Mico Pro® online:  
<https://micopro.murrelektronik.com>

### Link to Product

#### Illustration

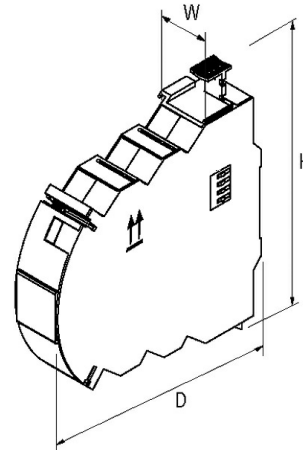

Product may differ from Image



#### General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20
Dimensions HxWxD	130x12x114 mm
Bridging concept	Bridge set (max. 40 A)

#### Output

Parallel usage/serial usage	-/Selectivity in 2 levels
No. of channels	2
Inrush capacity	max. 30 mF
Tolerance	0...+20%
Current adjustment	6 A

#### Input

Operating voltage	12 V DC; 24 V DC (9...30 V DC)
Total current	max. 40 A

#### Connections (IN)

Connection	Bridge system
------------	---------------

#### Connections (OUT)

Cross section (flex)	0.2...4 mm <sup>2</sup> (AWG 24...12)
Connection	Push-In spring clamp terminals

Cross section (rigid) 0.2...2.5 mm<sup>2</sup> (AWG 24...14)

**Control inputs**

Input voltage (ON)	via power module
Impulse length (CTRL)	via power module
Input voltage (CTRL)	via power module
Impulse length (ON)	via power module

**Control outputs**

Early warning (90%)	via power module
Group alarm output	via power module

**Commercial data**

country of origin	CZ
customs tariff number	85363010
EAN	4048879552653
eClass	27371802
Packaging unit	1.000