

T COUPLER M12 LITE MALE / M12 LITE FEMALE 0°

T-coupler

Male straight – females straight

M12 – M12, 5-pole




Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

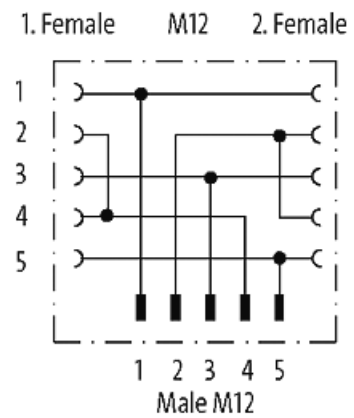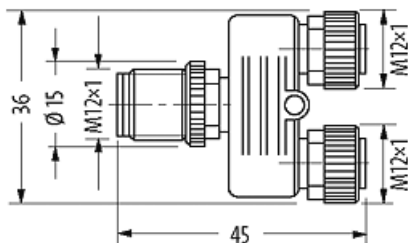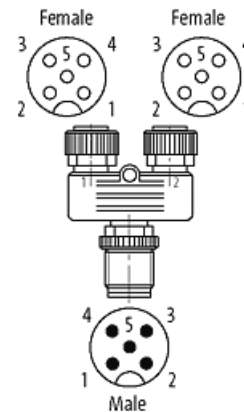

Product may differ from Image



Form

Form 41181

Technical Data

Operating voltage max. 60 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing

Protection IP67 inserted and tightened (EN 60529)

Locking material Black plastic

Rated surge voltage 1.5 kV

General data

Temperature range -25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879109444
eClass	27279218
Packaging unit	1