


Modlight Illumix Classic Line C18W

LED machine lamp, IP67, 24VDC, 2xM12 connection

Modlight Illumix Classic Line C
18 W
expandability

[Link to Product](#)

Illustration

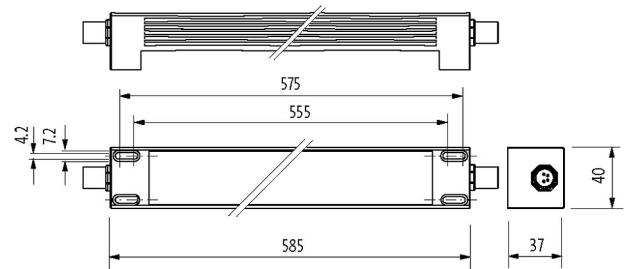

Product may differ from Image



Technical Data

| | |
|-------------------------|--------------------------------|
| Operating voltage | 24 V DC (21.6...27.6 V DC) |
| No. of poles | 4-pole |
| Coding | A-coded |
| Connection | M12 (male) |
| Luminaire light yield | approx. 105 lm/W |
| Luminaire light current | approx. 1890 lm |
| Color reproduction (Ra) | > 80 |
| Light color | Daylight white, approx. 5500 K |
| Lighting angle | > 120° |
| Input current | 18 W |

General data

| | |
|------------------------|--|
| Mounting method | rotatable |
| Temperature range | -30...+50 °C |
| Material (housing) | Anodized aluminum |
| Material (light cover) | diffuse single-pane safety glass (ESG), 4 mm |
| Installation altitude | Operation up to 2 000 m |
| Vibration stress | 2...9 Hz/10 mm; 9...200 Hz/3 g |
| Screw head-Ø | max. 12 mm/M5 |
| Relative humidity | 5...95% |
| Protection | IP67 |
| Dimensions H×W×D | 37×585×40 mm (1.46×23.03×1.57 in) |
| Shock load | 50 g, 11 ms |

Commercial data

| | |
|-----------------------|----------|
| country of origin | DE |
| customs tariff number | 94054239 |

| | |
|----------------|---------------|
| EAN | 4048879752442 |
| eClass | 27110306 |
| Packaging unit | 1.000 |