

MTS 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 63VA IN: 230/400VAC +/- 15VAC OUT: 230VAC

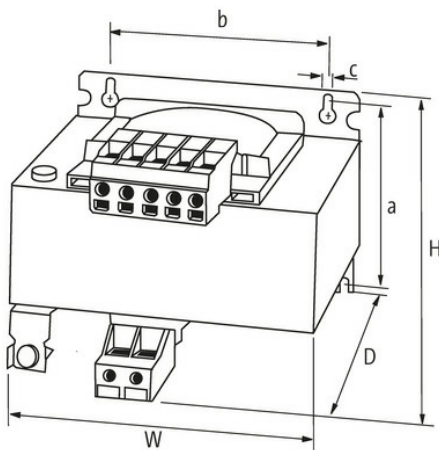
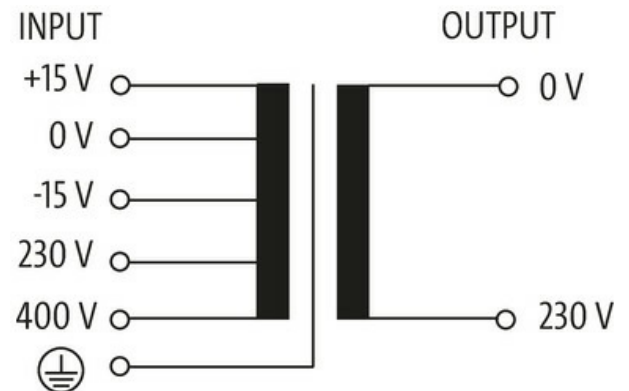
Single-phase - Control and Isolation Transformers

63 VA

Isolation class T 40/B

Spring clamp terminals

Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8x8.4 mm

Fixing centers a×b×c	56×56×4.8 mm
----------------------	--------------

Dimensions H×W×D	79×78×93 mm
------------------	-------------

Output

Output voltage	230 V AC
----------------	----------

Output rating	63 VA
---------------	-------

Input

Input voltage	230/400 ±15 V AC
---------------	------------------

Inrush current	2 A (230 V AC); 1.15 A (400 V AC)
----------------	-----------------------------------

Short-circuit current	2.64 A (230 V AC); 1.52 A (400 V AC)
-----------------------	--------------------------------------

Input current	0.32 A (230 V AC); 0.18 A (400 V AC)
---------------	--------------------------------------

Frequency	50...60 Hz
-----------	------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85043180
-----------------------	----------

EAN	4048879065962
-----	---------------

eClass	27031302
--------	----------

Packaging unit	1.000
----------------	-------