

M12 ADAPTOR ON TOP OF MSUD VALVE PLUG FORM A 18MM

Form A (18 mm) – M12, connector top entry

max. 110 V AC/DC

without components


3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.



[Link to Product](#)

Illustration

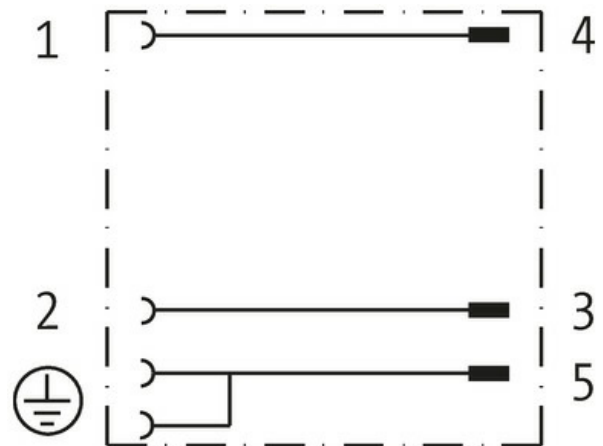

Female

Male

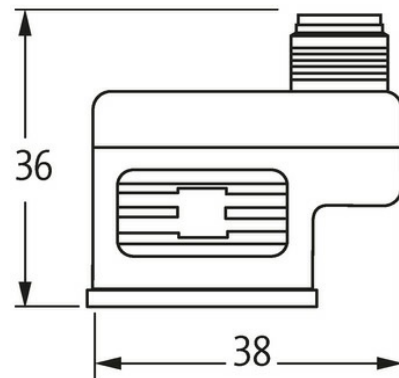

Depth: 27 mm

Product may differ from Image



Form

Form 41261

Technical Data

Operating voltage max. 110 V AC/DC

Rated surge voltage 1.5 kV

Operating current per contact max. 4 A

Material group	IEC 60664-1, category I
Coding	M12, A-coded
Locking of ports	M3/M12×1 mm (recommended torque 0.4/0.6 Nm)
Protection	IP67 inserted and tightened (EN 60529)
Configuration	2 contacts + bridged PE

General data

Pollution Degree	3
Temperature range	-25...+85 °C

Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879144728
eClass	27143423
Packaging unit	1.000