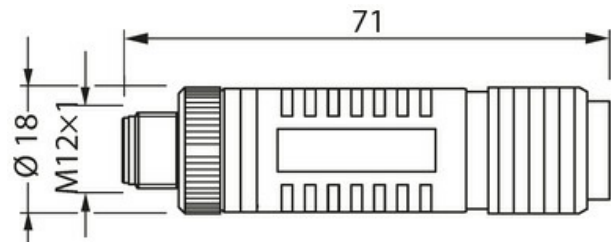
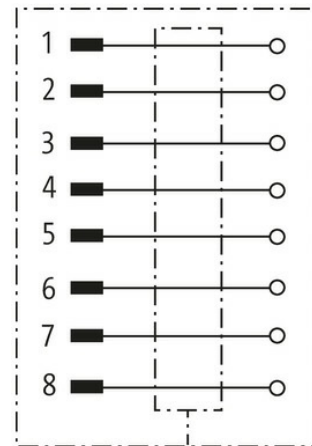




M12 male 0° X-cod. IDC

8-pol., AWG26-22, 6,5 - 9 mm, CAT6A

Ethernet CAT5
M12, 8-pole
Male straight
X-coded
shielded
IDC terminals

[Link to Product](#)**Illustration****Male**

Product may differ from Image

**Form**

Form 21111

Technical Data

Operating voltage 50V AC/60V DC

Operating current per contact max. 2 A

No. of poles 8

Transfer parameters CAT6A

Transfer rate 10 Gbit/s

Coding X-coded

Locking of ports Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing

Compression gland	M12 (SW17)
Connection cross section	0.14...0.34 mm ² (AWG 26...22)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)

General data

Temperature range	-40...+85 °C
Shielded	Shielded
Connection	Insulation displacement technology IDC

Commercial data

country of origin	PL
customs tariff number	85366990
EAN	4065909014141
eClass	27279220
Packaging unit	1.000