

### Reset button with 1 illuminated push button

1 NO contact in a IP65 enclosure

R-Button / 42 1NO L M12(4)

with M12 connection

4-pole

1 button can be lit (1 NO contact)


Delivery contents:

Flat lens, transparent clear, red, yellow, green, blue


Label plates, O, I, R

### Link to Product

#### Illustration

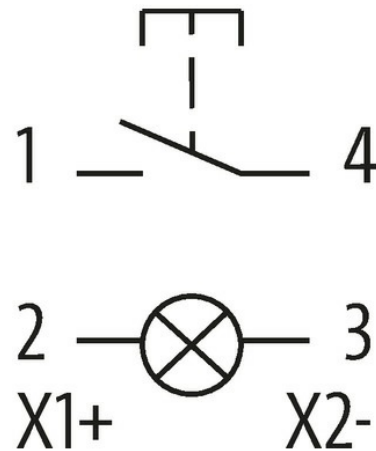

Male




PIN 1: N/O 1

PIN 2: (X1/+)

PIN 3: (X2/-)

PIN 4: N/O 1

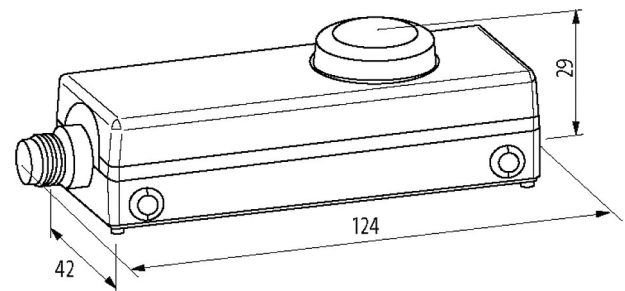

Product may differ from Image

#### Technical Data

Contact bounce time	max. 10 ms
Switching capacity	15 A (AC 15); 2.2 A (DC 13)
LED Light	max. 30 V AC/DC typ. 14 mA (24 V DC)

#### General data

Mounting method	with clip on back
Material (contact)	Ag Ni
Temperature range	-25...+70 °C (storage temperature -25...+85 °C)
Lambda (d)	50% (N/O)
B10d	1 000 000
Mech./ elect. life	1 000 000 operations, load-temperature dependent

Protection	IP65
Connection	M12 (4-pole)
Dimensions H×W×D	29×124×42 mm
<b>Contact Layout</b>	
PIN 1	N/O 1
PIN 2	(X1/+)
PIN 3	(X2/-)
PIN 4	N/O 1
<b>Utilization category</b>	
AC-15	1.5 A (240 V AC)
DC-13	2 A (24 V DC)
<b>Commercial data</b>	
country of origin	DE
customs tariff number	85365080
EAN	4048879600507
eClass	27371228
Packaging unit	1.000