

M8 panel feed through 3p shielded

Control cabinet entry system

Male - female



M8, 3-pole

Rear mounting


shielded

[Link to Product](#)


Illustration

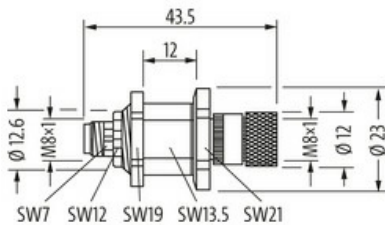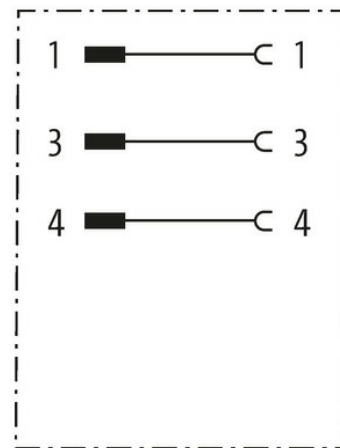


panel cut out



Male



Female



Product may differ from Image

Form

Form 88111

Technical Data

Operating voltage	250 V
Rated surge voltage	2.5 kV
Operating current per contact	max. 4 A
No. of poles	3
Material group	3
Mating cycles	≥ 100
LED display	no
Compression gland	M8
Protection	IP67 inserted and tightened (EN 60529)
suitable for corrugated tube (internal Ø)	without
Housing	Metal
Over voltage category	2

General data

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Mounting method	inserted, tightened
Material (contact)	Copper alloy
Material (contact surface)	Au
Pollution Degree	3
Temperature range	-25...+85 °C
Material (contact carrier)	PA

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879689298
eClass	27143423
Packaging unit	1.000