

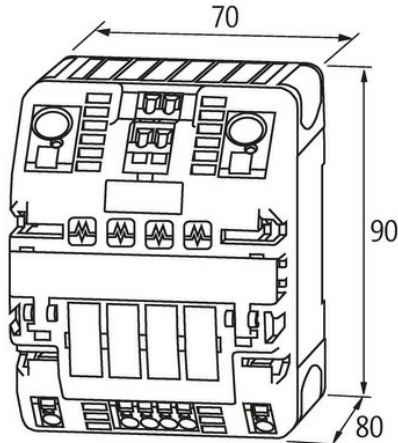
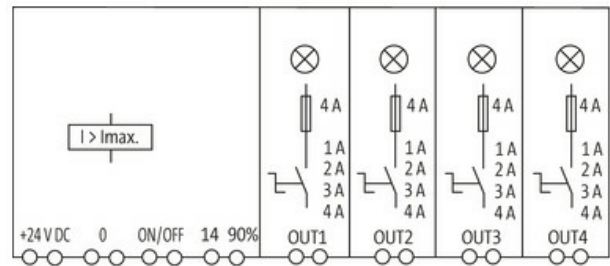
**MICO+ 4.4 electronic circuit protection, 4 CHANNELS**

IN: 24 V DC OUT: 24 V / 1-2-3-4 A

MICO+ 4.4

4 channels

Current adjustment 1, 2, 3, 4 A

[Link to Product](#)**Illustration**

Product may differ from Image

**Class 2**  
UL1310/NEC 725
**General data**

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Bridging concept	two sides, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 2× 1.5 mm <sup>2</sup>
Input terminals	2× 16 mm <sup>2</sup>

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Alarm terminals	2.5 mm <sup>2</sup>
-----------------	---------------------

**Output**

Inrush capacity	max. 20 mF (per channel)
-----------------	--------------------------

Current adjustment	1 A, 2 A, 3 A, 4 A, by countersunk rotary switch, sealed
--------------------	--

**Input**

Operating voltage	24 V DC (18...30 V DC)
-------------------	------------------------

**Control inputs**

Input voltage (ON)	10...30 V DC
--------------------	--------------

Impulse length (ON)	min. 20 ms
---------------------	------------

Remote start (OFF)	10...30 V DC
--------------------	--------------

**Control outputs**

Early warning (90%)	max. 20 mA; high: one channel over 90%; low: all channels under 90%
---------------------	---

Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
--------------------	---

**Commercial data**

country of origin	CZ
-------------------	----

customs tariff number	85363010
-----------------------	----------

EAN	4048879328920
-----	---------------

eClass	27371802
--------	----------

Packaging unit	1.000
----------------	-------