

## M40 Power Cable

Specification: 6FX8002-5CA58-1AJ0

Female straight – male straight

M40

6-pole, shielded

without cable sleeves




Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### Link to Product

#### Illustration

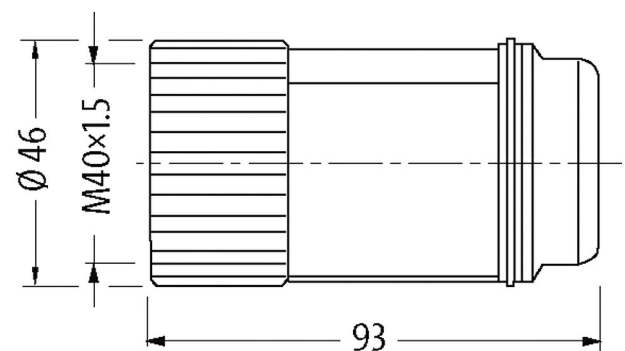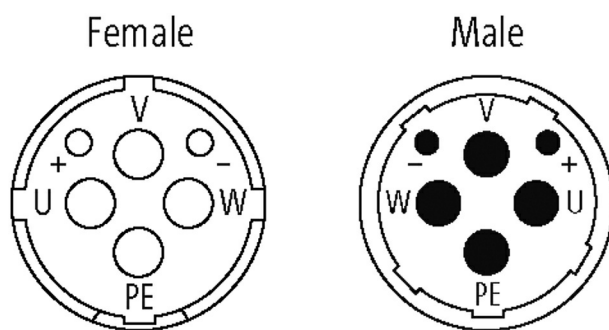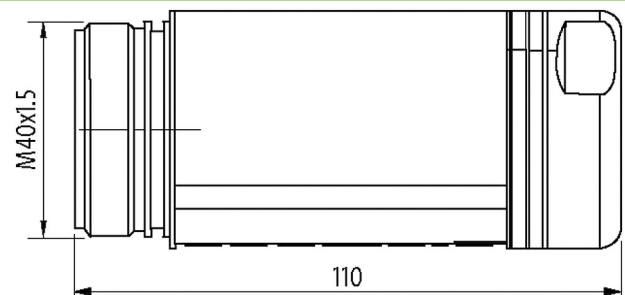

Product may differ from Image

#### Form

Form PS100

#### Technical Data

Operating voltage	max. 630 V AC/DC
Rated surge voltage	6.0 kV
Material group	IEC 60664-1, category I
Locking of ports	M40×1.5 mm
Compression gland	M40
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking material	Brass, nickel plated

#### General data

Pollution Degree	3
Temperature range	-20...+85 °C

#### Cables

Cable identification	895
----------------------	-----

Shield	yes
Outer-Ø (jacket)	14.8 mm ±5%
Color (jacket)	orange
<b>Commercial data</b>	
country of origin	DE
customs tariff number	85444290
EAN	4048879780544
eClass	27279218
Packaging unit	1